

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33209 A2

(51) International Patent Classification⁷: G01N 30/00

MUNARI, Fausto [IT/IT]; Corso Lodi, 59, I-20122 Milan (IT). GROB, Konrad [CH/CH]; Hintergasse 23, CH-8320 Fehraltorf (CH).

(21) International Application Number: PCT/EP00/10475

(22) International Filing Date: 25 October 2000 (25.10.2000)

(74) Agent: MARIETTI, Giuseppe; Marietti e Gislon S.r.l., Via Larga, 16, I-20122 Milan (IT).

(25) Filing Language: English

(81) Designated State (national): US.

(26) Publication Language: English

(30) Priority Data:
MI99A002271 29 October 1999 (29.10.1999) IT

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(71) Applicant (for all designated States except US): THERMOQUEST ITALIA S.P.A. [IT/IT]; Strada Rivoltana, I-20090 Rodano (IT).

Published:


— Without international search report and to be republished upon receipt of that report.

(72) Inventors; and

(75) Inventors/Applicants (for US only): MAGNI, Paolo [IT/IT]; Via S. Antonio, 2, I-20045 Besana Brianza (IT).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VAPORIZATION INJECTOR

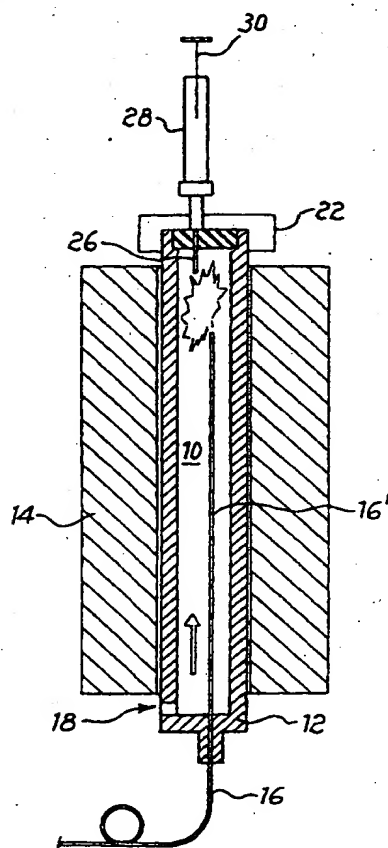

(57) Abstract: The invention relates to a vaporization injector for gas chromatography analysis instruments, of the type comprising a vaporization chamber, heated or which may be heated, with a longitudinally elongated shape, a device for hermetically inserting the needle of a syringe containing the sample (substance to be analysed and solvent) into the chamber, a connection for feeding a carrier gas into the chamber and a gas chromatography capillary column with an upstream end open inside the vaporization chamber. In order to allow the vaporization of large sample volumes, the upstream end of the gas chromatography column and the injection point of the sample into the vaporization chamber are both arranged adjacent to one of the longitudinal ends of the said vaporization chamber and the feed connection for the carrier gas is located adjacent to the other end (Fig. 2).



WO 01/33209 A2

"VAPORIZATION INJECTOR"

TECHNICAL FIELD

The present invention relates to a vaporization injector in an instrument for gas chromatography analysis.

5 BACKGROUND ART

Vaporization injectors are well-known in themselves and composed of a so-called vaporization chamber, generally in the form of a heated cylinder, connected on one side (usually the bottom) to a capillary gas chromatography column and closed on the other side (top) by a
10 septum destined to be perforated by a needle for injecting the sample. This needle is fitted to a syringe containing a measured quantity of sample, composed of the substance to be analysed and a solvent for this. The needle is inserted, perforating the septum, to a pre-established position inside the vaporization chamber and the liquid
15 sample is thrust by the syringe piston into this chamber, where it vaporizes before being carried to the gas chromatography column by the carrier gas, which is generally fed in on the same side, namely the top part of the chamber. Depending on the methods chosen, the sample may either be injected into the column partially (split mode) or
20 totally (splitless mode).

In any case, it is important for the sample to vaporize optimally and totally in the vaporization chamber, where it is temporarily stored before being sent to the column.

The current trend to increase the sample volumes injected creates
25 some problems, especially in splitless vaporization injection, specifically relevant to the capacity of the vaporization chamber and filling this in an optimum manner. In fact, the transversal dimensions (diameter) of the chamber cannot be increased beyond certain limits for reasons

related to vapours mixing with the carrier gas and complete transfer of the sample to the column. On the other hand, an increase in the capacity of the chamber by increasing its length does not have any significant effects, as the vaporized sample tends to be stored in the chamber above the injection point, namely from the tip of the injection needle. Nonetheless, the length of the injection needle is necessarily limited, both for reasons related to mechanical resistance and for reasons concerning excessive dead volume, represented by the internal channel of the needle.

10 **DISCLOSURE OF THE INVENTION**

Having stated this, it is now an object of the present invention to provide a vaporization injector, especially of the splitless type, in which the aforesaid limits in the increase of the capacity of the vaporization chamber by means of increasing the longitudinal dimensions of this chamber are overcome and it is thus possible to proportion the vaporization chamber optimally, to obtain temporary storage also of large amounts of sample.

15 A further object of the invention is to obtain in a reliable manner a cloud of vapour in a specific portion inside the vaporization chamber, contrary to what occurs in the known technique.

20 According to the invention, the aforesaid objects are implemented by means of a vaporization injector as claimed in claim 1.

BEST MODE FOR CARRYING OUT THE INVENTION

25 The aforesaid and other peculiarities and features of the invention shall now be illustrated in greater detail, with reference to embodiments given merely as an example and schematised in the enclosed drawings in which:

figure 1 is a schematic cross-section of a vaporization injector

according to the currently known technique;

figure 2 is a schematic cross-section of a first embodiment of the invention;

figure 3 is a schematic cross-section of a second embodiment of the invention;

figure 4 is a schematic representation of a further embodiment of the invention.

With reference, firstly to figure 1, a conventional vaporizer essentially comprises a generally elongated tubular chamber 10, equipped with a tube of inert material (liner) 12 and heated independently by a device such as a heating element 14. The upstream end of a gas chromatography capillary column 16 is inserted hermetically to the bottom of the chamber 10, whilst a carrier gas feed is represented in the diagram with 18. The top part of the vaporization chamber 10 is closed by a perforable septum 20, held in position by a covering component 22 having a guide for the needle 26 of a syringe 28 with a piston or plunger 30.

The sample, composed of a pre-established quantity of the substance to be analysed and a solvent for this, is drawn up using the syringe 28, the needle of which is then inserted into the guide, perforates the septum 20 and enters the vaporization chamber, where the sample is injected using the piston 30. Operations to draw up the sample and inject it into the vaporization chamber 10 may either be performed manually or using an automatic sampling device. Moreover, penetration of the needle in the chamber 10 is pre-established by a stop, acting for example on the body of the syringe 28.

Inside the chamber 10, at high temperature, the sample vaporizes and is conveyed by the carrier gas, either totally or partially, to the

gas chromatography column.

In the embodiment of figure 2, according to the invention, the needle 26 of the syringe 28 is preferably much shorter in length than the one of the embodiments of the prior art, for example, of such a length that the tip of the needle, when injecting the sample, only penetrates the vaporization chamber 10 by 10 mm or even less and with a bottleneck that favours nebulization of the sample injected, according to what is illustrated in another patent application by the same Applicant.

Once more according to the invention, the column 16 has a length 16' that extends along much of the length of the chamber 10, until its open upstream end is in the vicinity or in any case in the zone of the needle tip 26. Nonetheless, column 16' and needle 26 must not be aligned to prevent the risk of liquid parts of the sample from being injected into the column, but they must be in a staggered position. This is achieved, for example, by placing the needle in an eccentric position and/or placing and holding at least the upstream end of the column in an eccentric and staggered position in relation to the position of the needle, by means of a ring in inert material (for example Restek silcosteel) with a seat for the column. Carrier gas supply 18 is instead provided in a position longitudinally opposite the zone with the end of the column 16' and tip of the needle 26, namely in the case illustrated on the bottom of the vaporization chamber 10 and this either permanently or limited to the period in which the sample is injected, by means of a branch on the carrier supply line.

This distribution of components operating inside the vaporization chamber permits implementation of optimum sample vaporization conditions, storage of the sample from the top towards the bottom of the chamber and transfer of the vaporized sample to the gas

chromatography column. Moreover, as a result of the conditions of storing the sample in the chamber, there are no limits to the increase in the capacity of the latter by increasing its length, as the length of the needle does not need to be modified.

- 5 Lastly, the specific layout opposite each other of the points for introducing the sample and carrier gas respectively allows the cloud of vapours created after the sample is injected to be positioned in a reliable and well-defined position inside the vaporization chamber, thus preventing all risks of partial loss of this sample.
- 10 The same advantageous operating conditions can be obtained with a layout of the type shown in the diagram of figure 3, in which the upstream end of the column 16 and the tip of the needle 26 are arranged not aligned, on the bottom of the vaporization chamber 10, for nebulization and vaporization of the sample in this zone, storage of
15 the vaporized sample towards the top of the chamber 10 and, thereafter, introduction into the gas chromatography column 16 through the carrier gas fed into the chamber 10 from the opposite side, namely from the top, as indicated with 18.

In the embodiment of figure 4, the vaporization chamber 10 is
20 arranged horizontally, with the end of the column and the injection point at one end of the chamber 10 and the carrier gas inlet, in 18, at the other end. In the injection zone, the chamber has a block 30, for example made of metal, heated either independently or by the atmosphere of the chamber itself, which comprises an inside channel
25 32 to which the tip of the syringe needle 26 is connected hermetically. The channel in the case illustrated is curved and its end facing the chamber is equipped with one or more bottlenecks to cause nebulization of the injected sample. As specified in a patent

6

application by the same Applicant, this is a means of obtaining optimum sample vaporization, elimination of the septum and washing of the channel 32 by the carrier gas after injection of the sample.

5

CLAIMS

1. A vaporization injector for gas chromatography analysis instruments, comprising a vaporization chamber, heated or which may be heated, with a longitudinally elongated shape, a device for
5 hermetically inserting the needle of a syringe containing the sample (substance to be analysed and solvent) into the chamber, a connection for feeding a carrier gas into the chamber and a gas chromatography capillary column with an upstream end open inside
the vaporization chamber, characterized in that the upstream end of
10 the gas-chromatography column and the injection point of the sample into the vaporization chamber are both arranged adjacent to one of the longitudinal ends of the said vaporization chamber and the feed connection for the carrier gas is located adjacent to the other end.
- 15 2. An injector as claimed in claim 1, characterized in that a limited section of the needle of the syringe penetrates inside the vaporization chamber, for a length from 0 to 15 mm.
3. An injector as claimed in claim 1 or 2, having a vertically elongated vaporization chamber, characterized in that the point in
20 which the sample is injected is adjacent to the upstream end of the vaporization chamber; in that the gas-chromatography column crosses the vaporization chamber longitudinally, from the bottom end until its open end is adjacent to the upstream end of such chamber; and in that the carrier gas is introduced in the vicinity of the bottom
25 end of the vaporization chamber.
4. An injector as claimed in claim 3, characterized in that it comprises means for feeding the carrier gas in the vicinity of the bottom end of the vaporization chamber while the sample is being injected and

means for feeding carrier gas in the vicinity of the upstream end of the vaporization chamber during analysis.

5. An injector as claimed in claim 1 or 2, having a vertically elongated vaporization chamber, characterized in that the point for
5 injecting the sample is located adjacent to the bottom end of the vaporization chamber; in that the open end of the gas chromatography column is adjacent to the bottom end of this chamber; and in that the carrier gas is injected adjacent to the upstream end of the vaporization chamber.
- 10 6. An injector as claimed in one of the previous claims, characterized in that the direction for injecting the sample into the vaporization chamber and the axial direction of the gas chromatography column inside the vaporization chamber are not reciprocally aligned.
- 15 7. An injector as claimed in claim 6, characterized in that the direction for injecting the sample into the vaporization chamber and the axial direction of the gas chromatography column are parallel to one another and located at one end of the vaporization chamber.
8. An injector as claimed in one of the previous claims,
20 characterized in that the sample is injected into the vaporization chamber through a channel, fed at its upstream end by the needle of the syringe.
9. An injector as claimed in claim 8, characterized in that the channel is hermetically coupled to the tip of the needle and its
25 downstream end has one or more bottlenecks for nebulizing the sample injected into the vaporization chamber.
10. An injector as claimed in claim 9, characterized in that the channel is obtained in a block of material suitable for transmitting

heat, heated either independently or by the atmosphere of the vaporization chamber.

11. An injector as claimed in claim 8, 9 or 10, characterized in that the layout of the vaporization chamber is essentially horizontal and
- 5 that the channel for introducing the sample is curved, to connect an essentially vertical inlet to an essentially horizontal outlet.

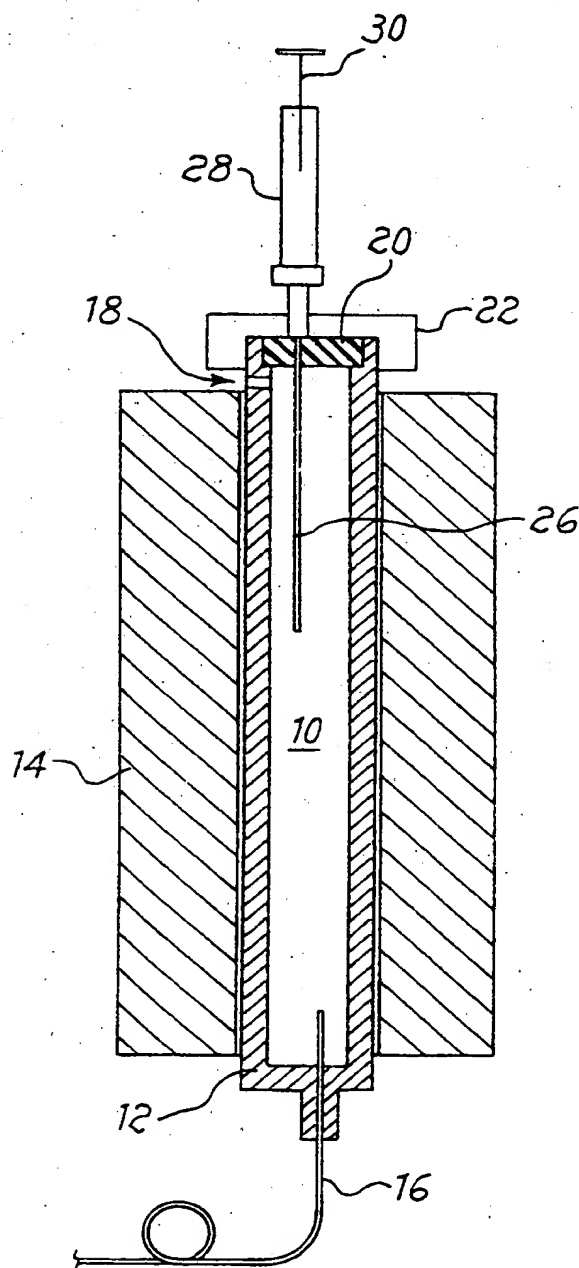
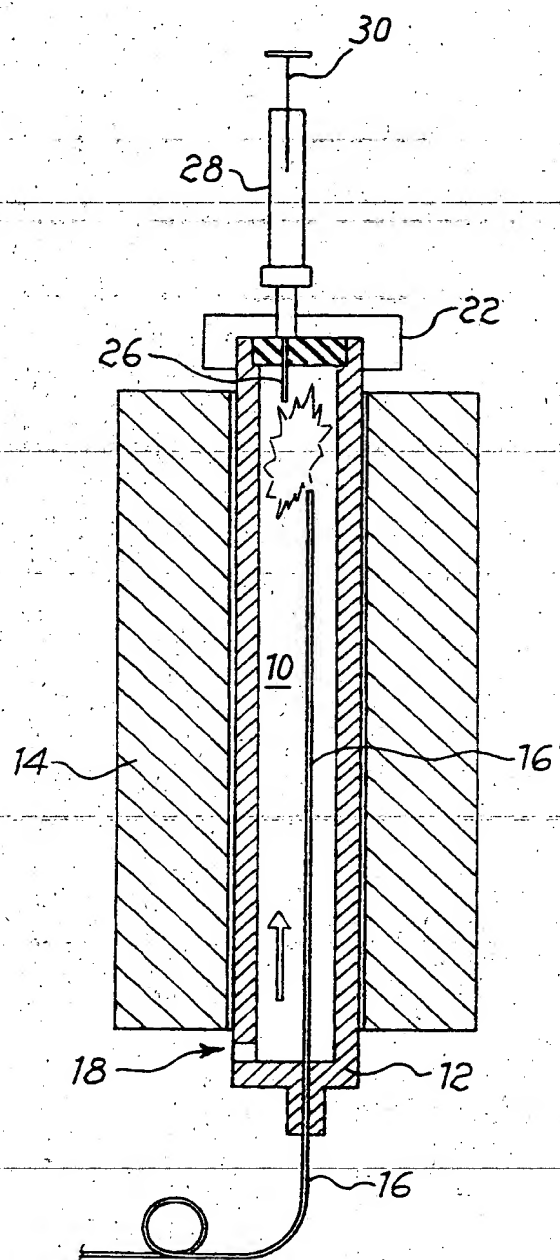
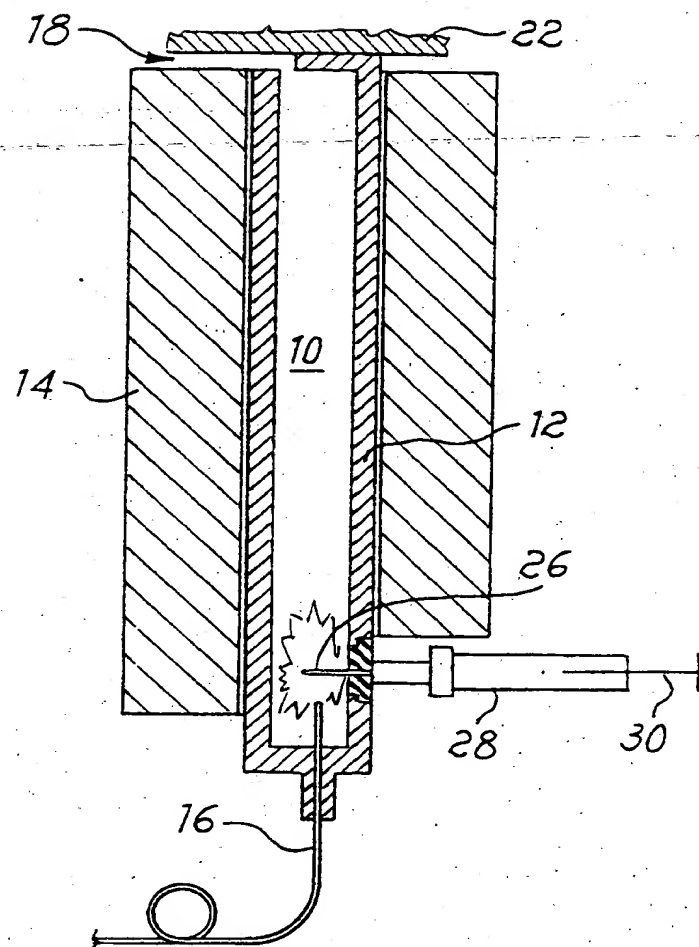
Fig. 1

Fig. 2

3/3

Fig. 3Fig. 4